

# FURUNO



www.furuno.com

# NAVnet 3D



MaxSea® is a registered trademark of MaxSea International S.A.S.  
TimeZero® is a registered trademark of MaxSea International S.A.S.  
Mapmedia® is a registered trademark of Mapmedia S.A.S.  
NMEA 2000® is a registered trademark of the National Marine Electronics Association.

TRADEMARK REGISTERED  
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

**FURUNO ELECTRIC CO., LTD.**  
Nishinomiya, Hyogo, Japan  
Phone: +81 (0)798 65-2111  
Fax: +81 (0)798 65-4200, 66-4622

**FURUNO FRANCE S.A.S.**  
Bordeaux-Mérignac, France  
Phone: +33 5 56 13 48 00  
Fax: +33 5 56 13 48 01

**FURUNO NORGE A/S**  
Ålesund, Norway  
Phone: +47 70 102950  
Fax: +47 70 102951

**FURUNO POLSKA Sp. z o.o.**  
Gdynia, Poland  
Phone: +48 58 669 02 20  
Fax: +48 58 669 02 21



08035U Printed in Japan  
Catalogue No. R-195

**FURUNO SVERIGE AB**  
Västra Frölunda, Sweden  
Phone: +46 31-7098940  
Fax: +46 31-497093

**FURUNO DEUTSCHLAND GmbH**  
Rellingen, Germany  
Phone: +49 4101 838 0  
Fax: +49 4101 838 111



**FURUNO ESPAÑA S.A.**  
Madrid, Spain  
Phone: +34 91-725-90-88  
Fax: +34 91-725-98-97

**FURUNO DANMARK AS**  
Hvidovre, Denmark  
Phone: +45 36 77 45 00  
Fax: +45 36 77 45 01

**LLC "FURUNO EURUS"**  
St. Petersburg, Russian Federation  
Phone: +7 812 767 15 92  
Fax: +7 812 766 55 52

**FURUNO U.S.A., INC.**  
Camas, Washington, U.S.A.  
Phone: +1 360-834-9300  
Fax: +1 360-834-9400

**FURUNO DANMARK AS**  
Hvidovre, Denmark  
Phone: +45 36 77 45 00  
Fax: +45 36 77 45 01

**FURUNO FINLAND OY**  
Espoo, Finland  
Phone: +358 9 4355 670  
Fax: +358 9 4355 6710

POWERED BY **MaxSEA**

www.navnet.com



## Adding a New Dimension to 3D

Onboard vessel navigation has undergone something of a revolution in recent years.

Never before has so much information been available to you to improve and enhance your boating experience.

FURUNO's dedication to deliver the most intuitive, integrated onboard navigation solutions has led to the launch of NavNet 3D, a powerful new tool designed to integrate all navigation functions on a modern leisure vessel in one easy to use control unit.

Let NavNet 3D take you easily to routes less travelled.



## FURUNO's NavNet 3D allows complex tasks to be performed through a simple user interface.

Cleverly integrating all the instrumentation on your vessel to give you a stress-free boating experience. Once you start using NavNet 3D you will be amazed to see how completely different it is from existing onboard navigation systems.

NavNet3D expands your horizons.



### TimeZero® Technology makes chart redraw a thing of the past.

NavNet 3D utilizes cutting-edge technology, called "TimeZero". "TimeZero" facilitates instant chart redraw, allowing you to zoom in and out, change display mode and manage points and routing seamlessly. There is no time lag for redraw, everything takes place in real time. For the ultimate in flexibility and the fastest NavNet 3D redraw, look to the Black Box (MFDBB), which features a super-charged graphics processor.



### Instinctive, clear chart presentation.

NavNet 3D adds a whole new dimension to chart presentation. You can choose a 2D aerial view of the navigation chart or a 3D navigation chart with adjustable viewing points. Switch on Satellite PhotoFusion™, and photographic images are incorporated into chart presentation. Driven by a simple user interface, all this information helps to improve your situational awareness by giving you unprecedented control over your charting environment.

### NavNet 3D RotoKey™ puts a whole new spin on "User Friendly".

NavNet 3D challenges a conventional menu operation scheme with the new concept the "RotoKey™", on-screen revolving menu keys. By turning a rotary knob on the control panel, RotoKey™ will be activated to give you full access to NavNet 3D controls.



# NavNet 3D Features

NavNet 3D is built around a powerful graphic engine, managed by TimeZero® technology. This system adds new presentation options on top of conventional 2D chart presentation: 3D chart and Satellite PhotoFusion™, a new hybrid blend of detailed satellite imagery containing critical chart data. In these modes it becomes possible to visually grasp the exact position of your craft in a wider perspective.

## Navigate in True 3D

NavNet 3D incorporates “native 3D chart architecture” that allows for a full time 3-dimensional presentation, as opposed to 2D charts that require special effects to appear 3-dimensional. With NavNet 3D’s true 3D environment, you can see all of the information you want with no limitations on what information you wish to view. Plan your routes and enter points directly on your raster or vector native 3D charts. Overlay a variety of data with a touch of the RotoKey™, such as Radar overlay, AIS and ARPA targets plus all of your chart symbols and depth soundings; any and all of the information can be displayed at will. This is the beauty of navigating in NavNet 3D, you have full control over the presentation at all times.



3D Raster



3D Vector

## Satellite PhotoFusion™


Our high-resolution satellite photography can now be fused with raster or vector chart information. Land areas (zero depth) are completely opaque, so that these areas are displayed with high-resolution satellite photos on the chart. As the depth increases, the satellite photography becomes more transparent so that you will know where the shallows end and the deeper water begins. High-resolution satellite photography aids in seabed classification so that you will be able to easily identify areas of sand, rock, coral, and other obstructions.




Satellite & Raster/PhotoFusion™

## 3D Key

Even though the charts are always operating in their native 3D environment, one long press of the 3D key will toggle the chart from 3D to a familiar 2D, top-down perspective and vice versa.

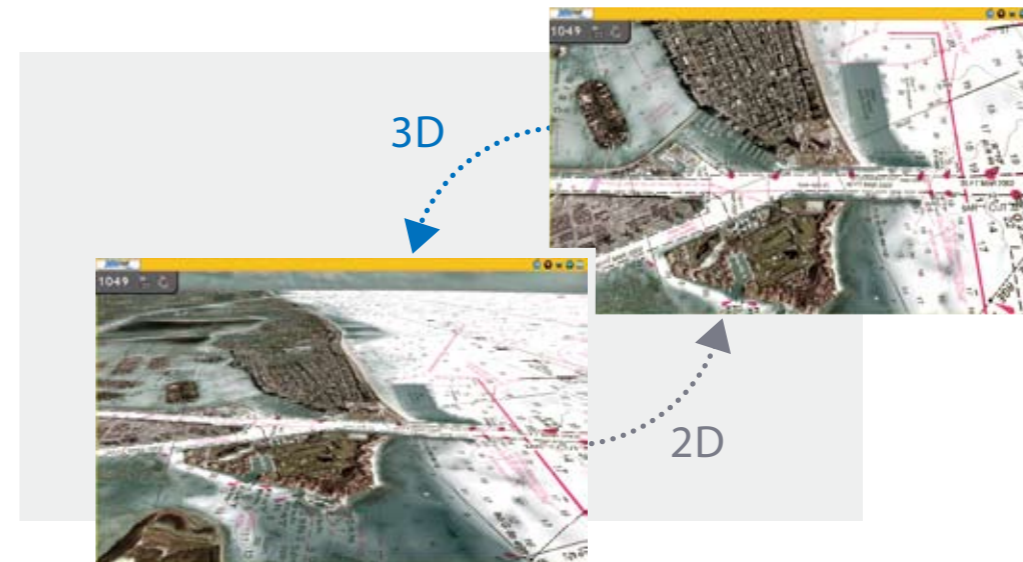

Satellite & 3D chart orientation

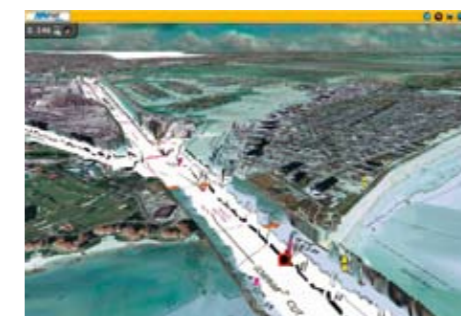


# The Only Acceptable Wait Time is Zero: TimeZero® Technology Changes Your Perspective on Chart Redraw

Its high-speed processor and powerful graphic engine deliver TimeZero® technology that facilitates seamless chart handling, zooming and panning without the screen disappearing. Blink and you will miss it! TimeZero® will dramatically speed up your onboard decision-making

by greatly simplifying chart handling actions. NavNet 3D TimeZero® technology redefines the meaning of stress-free operation. For the ultimate performance in chart redraw, step up to the NavNet 3D Black Box.


## Chart scaling without limitation

This completely new system design allows you to zoom seamlessly and continuously to whatever chart scale you desire. Instead of limiting you to a small handful of chart scales to choose from like traditional chart plotters, TimeZero® architecture allows you to zoom in or out to the exact magnification level you like without steps or limitations.

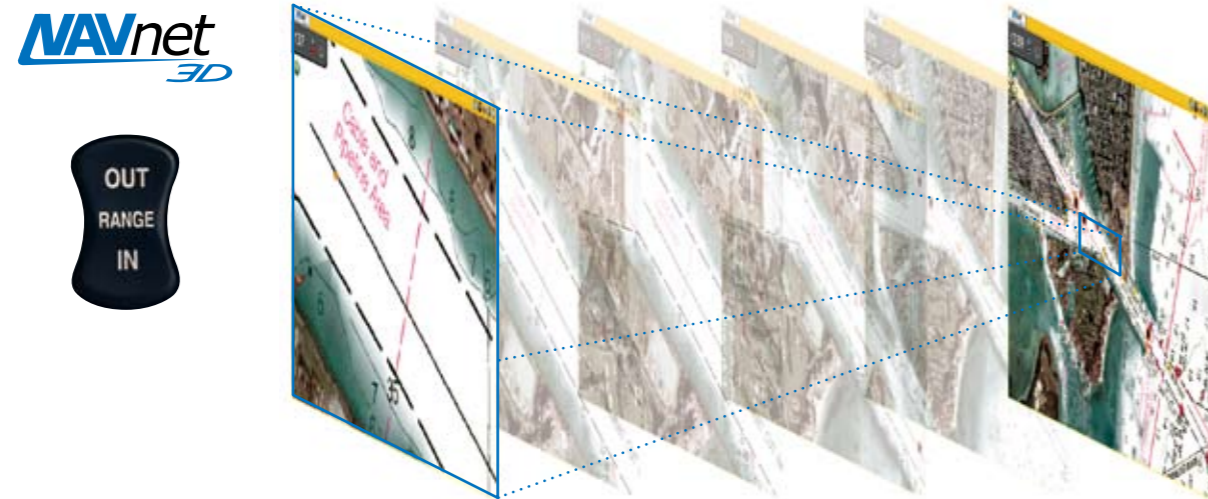

Smooth scaling delivers any range scale you desire.


## Conventional Chart Plotter

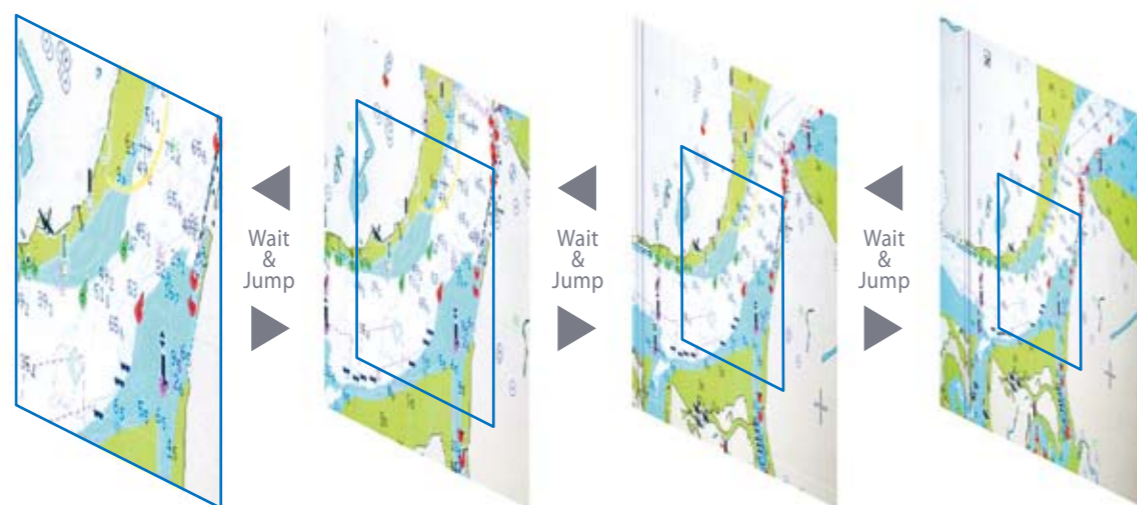

Conventional chart plotters have fixed range scales that you select from.

## Easy chart panning gives you freedom to explore

You can pan the chart freely by simply pressing the scrolling pad. This gives you freedom to explore the chart, allowing you to focus on a specific area ahead of or around your craft with greater intensity without losing track of your position on the chart. Explore the chart data at your leisure, and then instantly return to own ship at the touch of a single dedicated button. Displaying True and Relative Motion is now more intuitive than ever before. TimeZero® technology provides a useful utility for focusing on a specific direction such as the area ahead of your craft.

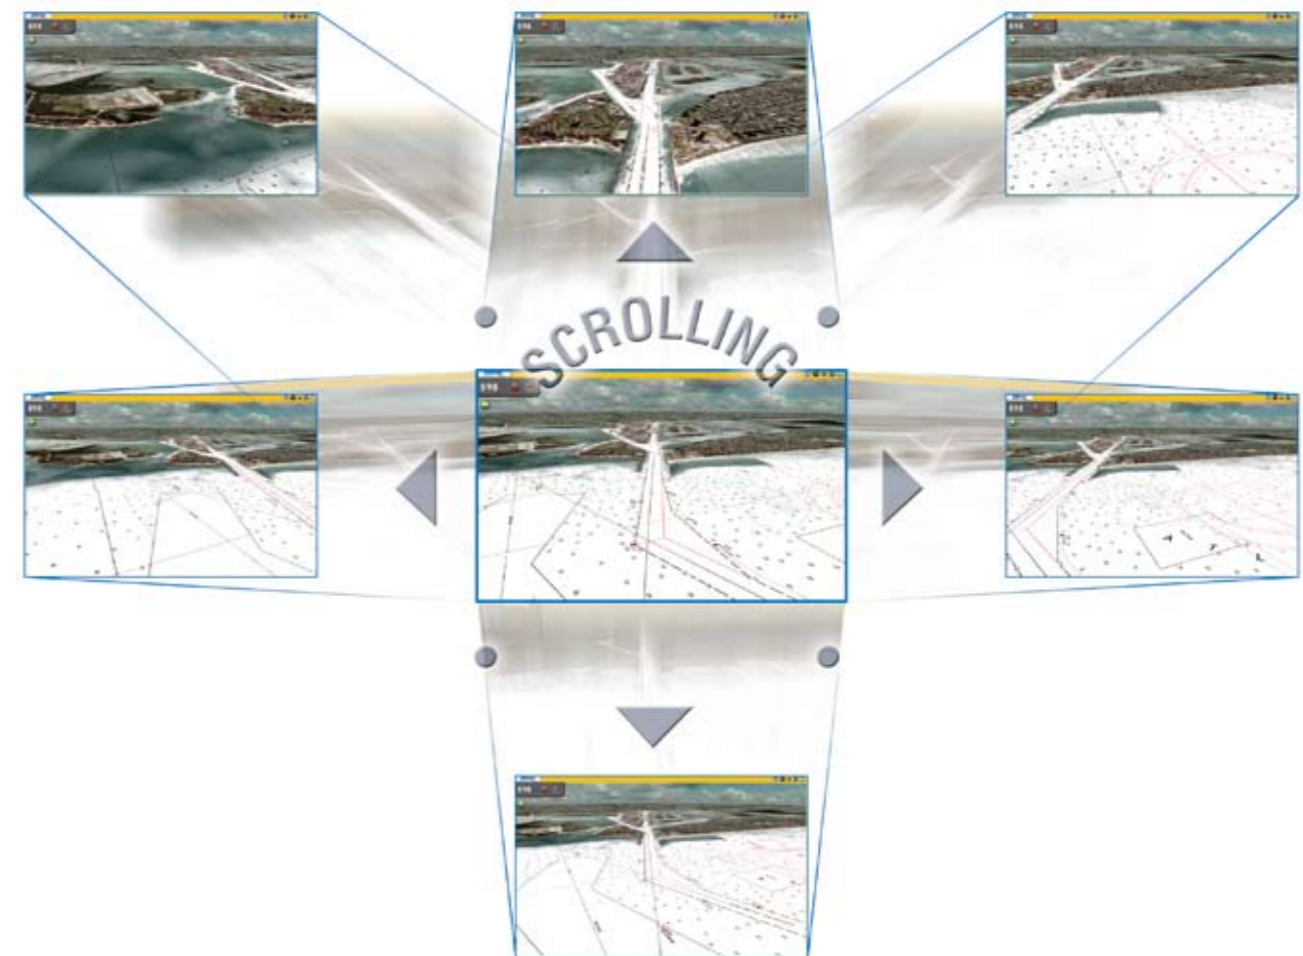


# Scalable operating system accommodates everyone from new boaters through to experienced navigators

NavNet 3D is designed to give you a user-friendly operating environment all the time through its scalable operating system. NavNet 3D's scalable operating system allows you to select the functions you wish to control from an extensive list of options.


## 1 Point & Shoot Interface

NavNet 3D allows for a more straightforward user interface with a combination of both RotoKey™ and a familiar point-and-shoot cursor pad control. The power of point-and-shoot interface allows for incredibly simple operation - click anywhere on the screen for context-sensitive options for that area. Click on any data box to access detailed information for that function. A variety of features can be accessed through a familiar left or right click interface. You can also connect a generic USB mouse to further simplify operation.

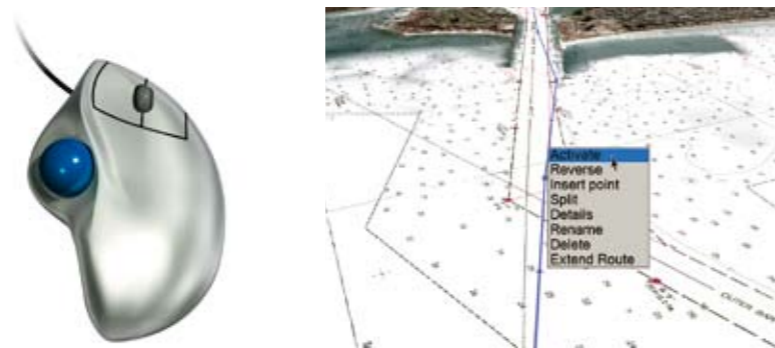

## 2 DISP Key

One press of the DISP button allows you to easily select the presentation you desire. Five intelligently designed hot-pages are available to you right out of the box, with the ability to save up to ten custom hot-pages. Customize any hot-page with a simple long press of the RotoKey™, which launches the hot-page wizard.

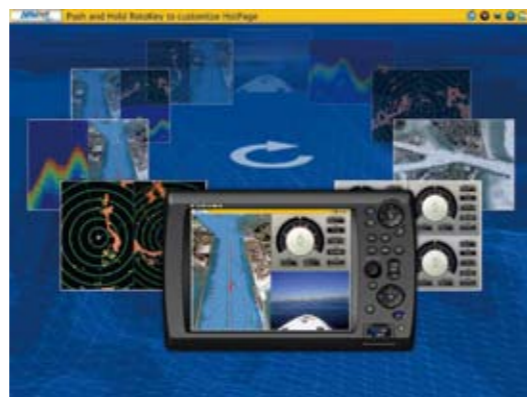

Hot-page wizard


## 3 RotoKey™

This is NavNet 3D's revolutionary new control that merges the power and versatility of soft keys with an easy-to-use rotary knob! One turn of the RotoKey™ gives you instant access to full control of NavNet 3D. The RotoKey™ is designed as a part of NavNet 3D's scalable operating system; a short press of the RotoKey™ gives you access to a user-selected set of the functions that you select upon installation from Basic, Standard, Full or Custom, while a longer press of the key displays all of the functions available. Never leave your navigation screen to enter a menu again!




## 4 Range Key

Simple press of the Range key allows you to adjust to the range scale of your choice with smooth zooming-in/out actions—thanks to TimeZero® technology.

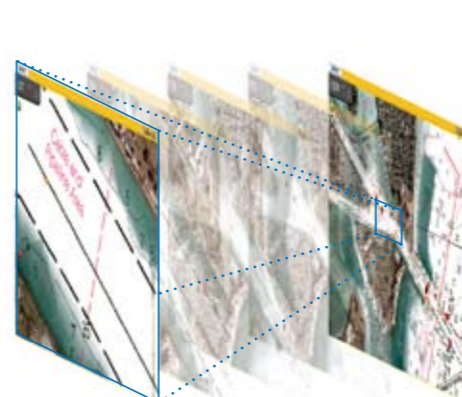


## 5 Scrolling Pad

The scrolling pad allows independent scrolling and panning capabilities from a dedicated omni-pad. Pan the chart or shift the radar quickly and seamlessly. You can also control Axis IP cameras without accessing complicated menus or changing your current presentation.

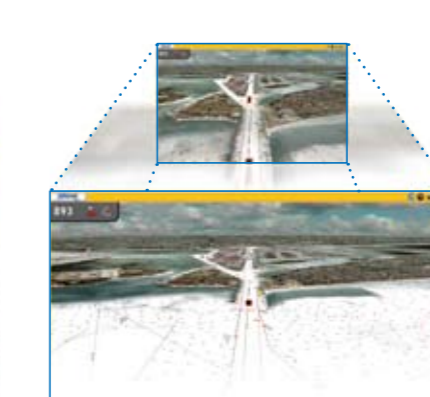

## 6 3D Key

One long press of the 3D key will toggle the chart from 3D to a familiar 2D, top-down perspective. While the chart remains in its native 3D environment, only the perspective shifts. Press the key again and you toggle back to 3D. There is no special mode required to shift back to 3D perspective.

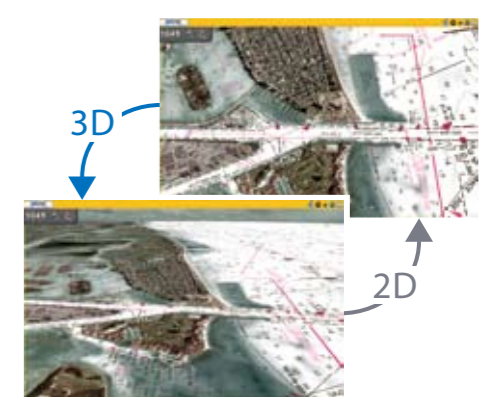


# FURUNO NavNet 3D Digital Solution sets a new Standard

NavNet 3D operates in a fully digitized environment with its highly sensitive digital sensors for radar and fish finder. NavNet 3D is not just that! Its operating structure is also digitized, delivering a total fusion of hardware and software modules in its operation scheme, utilizing Ethernet, NMEA0183 and NMEA2000.



## New Ultra High Definition (UHD™) Digital Radar

NavNet 3D integrates Ultra High Definition (UHD™) Digital Radar. This facilitates fully automatic, high precision Gain and Sea Clutter and Tuning Control for hands-free operation and optimum performance. One of the most striking features of FURUNO UHD™ Digital Radar is a fully independent "Real-Time" dual range radar display, which scans and displays two different radar ranges simultaneously with no lag at all. UHD™ Digital Radar is fully integrated into NavNet 3D's revolutionary TimeZero® technology, facilitating real seamless radar zoom without any display blackout (MFDBB). Also, the high-resolution radar image can perfectly be overlaid with NavNet 3D's native 3D chart in both 2D and 3D formats. All of these greatly enhance your situational awareness.

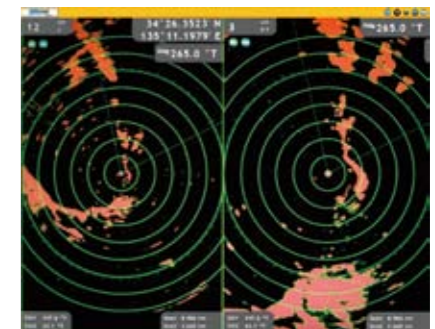


## FURUNO Digital Filter (FDF™) Fish Finder

You probably know about digital fish finders, but are not quite sure what they really mean. FURUNO Digital Filter (FDF™) fish finders feature advanced filtering capabilities and digital auto tuning, which eliminate noise and hence automatically spotting individual fish with staggering accuracy and detail. Whether it is used for shallow or deep water, FURUNO FDF™ fish finder gives you what you would expect from a fish finder at all times.



Enhanced shallow water detection by suppressing surface clutter.

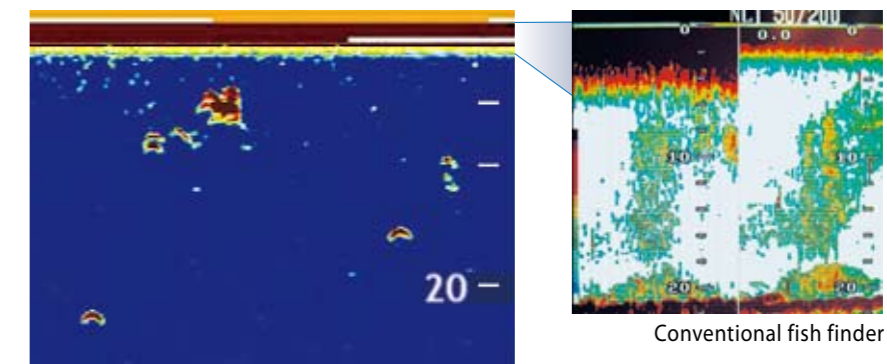

DFF1

# NavNet 3D Digital Sensors

Reliability of NavNet 3D lies in its excellent sensor performance, which is the result of the application of advanced Digital Signal Processing to both NavNet 3D radar and fish finders. These NavNet 3D digital sensors greatly boost your target detection and presentation capabilities.

## Ultra High Definition (UHD™) Digital Radar

FURUNO has taken its NMEA award-winning radar technology to the next level with Ultra High Definition Digital Radar. UHD™ offers crystal clear target presentation with automatic real-time digital signal processing. Antenna rotation speed (24/36/48 rpm) is automatically shifted appropriate to the pulse length you operate with. Commercial-grade radar performance is now available in the NavNet 3D ultimate leisure navigation suite.




### NavNet 3D Real-time Digital Auto Gain/Sea Clutter Controls

NavNet 3D employs revolutionary real-time digital auto Gain/Sea controls to deliver crystal clear radar presentation. With this new technical application, NavNet 3D computes and applies an adaptive omni-directional anti-clutter filter with variable intensity depending on bearing.



Auto Gain/Sea Controls On

Auto Gain/Sea Controls Off

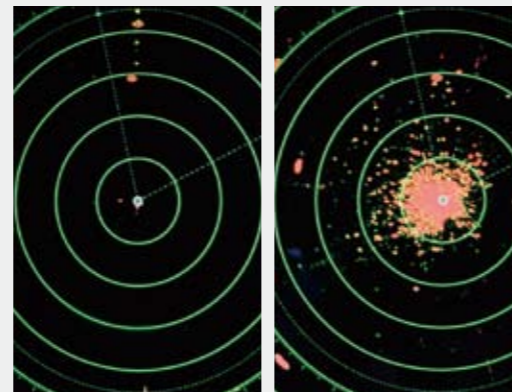


Auto Gain/Sea Controls On

Auto Gain/Sea Controls Off

### Real-time Dual Range Radar

NavNet 3D's simultaneous scanning technology drives our powerful dual-range radar, providing unsurpassed target detection. With each sweep of antenna, dual progressive scan transmissions are sent, received and processed to display two separate radar ranges on your NavNet 3D display all at the same time. Each radar presentation acts autonomously, allowing for manipulation of individual gain and clutter controls.

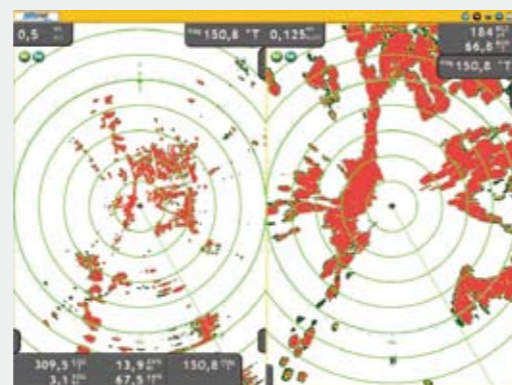

## FURUNO Digital Filter (FDF™) Fish Finder


FURUNO's DFF1 and DFF3 (available Summer 2008) feature the FURUNO Digital Filter (FDF™) technology. These new digital Network Sounders can turn any NavNet display into a powerful, dual frequency digital fish finder with selectable 600 W or 1 kW (DFF1) or 1/2/3 kW (DFF3) output power. DFF1 operates in the 50/200 kHz frequencies and can display either frequency alone or both on the same display. DFF3 lets you select any two frequencies between 28 kHz and 200 kHz.



The main difference between digital and conventional fish finders lies in the filtering capabilities and auto adjustments. Our award winning FDF™ technology helps to optimally adjust gain, STC (Clutter) and output power as well as suppress surface clutter. It also makes the picture clearer and easier to decipher. However, even the best digital filter won't help unless you start with a solid basis, such as FURUNO's renowned fish finder technology, which has made FURUNO the best friend of professional fishermen for years.

### Exceptional Shallow Water Detection with Surface Clutter Suppression

Surface clutter can be greatly suppressed by the digital filter, which facilitates exceptional shallow water detection. This enables you to spot fish targets that are close to surface.

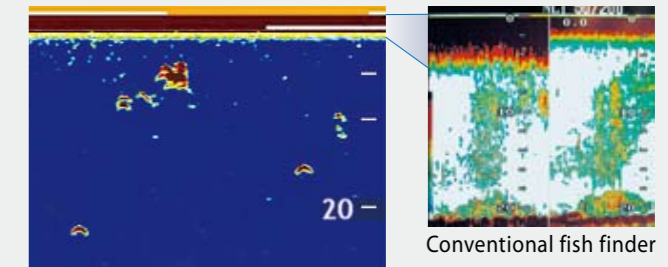


FURUNO's digital filter fish finder

Conventional fish finder

### Detailed Target Presentation

The digital filter of the DFF1 and DFF3 optimizes gain to obtain highly defined images of underwater conditions. The DFF1 and DFF3 clearly show fish targets suspended in the water column as well as those close to the seabed. The digital filter also eliminates noise to deliver sharp and detailed echo presentation, achieving detection of fishing reefs and individual fish with absolute clarity.

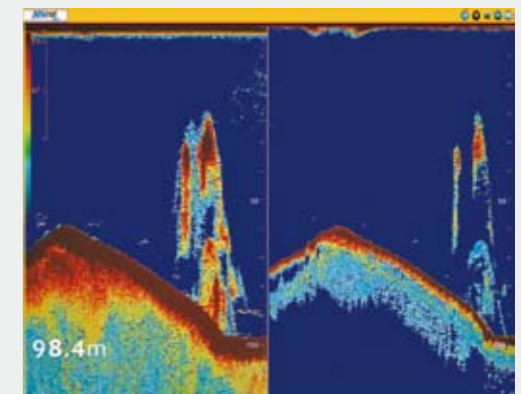



# NavNet 3D Network: Building Block Solution

NavNet 3D is built on an Ethernet network, allowing you to add as few or as many components as you desire along with up to ten displays to create your perfect navigational suite. Further, you can connect NMEA0183 and NMEA2000® devices to any display or BB processor and share that information across the Ethernet network automatically. User setting data can also be transferred by using SD cards for synchronization of operation settings amongst networked displays. Power on/off synchronization amongst all of the NavNet 3D display units can be done when the dedicated Ethernet hub HUB101 is used.

The NavNet 3D system is built around the most advanced chart plotting system available. When used in conjunction with UHD™ Digital Radar, FDF™ Fish Finder and your choice from a wide variety of sensor options plus up to 10 displays, it puts you at the center of an advanced navigation system. In addition, FURUNO's NAVpilot autopilot can also be connected to the system. It is easy to see how the basic chart plotter display becomes the genesis of the most sophisticated navigational suite available.



- Network Weather Facsimile FAX-30**  
Ethernet
- Smart Sensor**  
NMEA2000®
- Network Fish Finder DFF1/DFF3**  
Ethernet
- IP Camera**  
Ethernet
- External Alarm Output & Point/MOB Alert Input**  
Contact
- Variable Line Level/Stereo Output**  
Stereo

**Weather Station WS-200**  
NMEA2000®



**AIS FA-30/50/150**  
Ethernet for FA-30/50  
NMEA0183 for FA-150



**Nav Data Organizer/Remote Display RD-30**  
NMEA0183



**Instruments FI-50**  
NMEA2000®



**Compass PG-500**  
NMEA0183



**GPS Heading Sensor SC-30/50/110**  
NMEA2000® for SC-30  
NMEA0183 for SC-30/50/110

**GPS/WAAS Antenna GP-320B/330B**  
NMEA0183 for GP-320B/330B  
NMEA2000® for GP-330B



**Radar Sensors**  
Ethernet  
NMEA2000®



All the NavNet 3D radar sensors incorporate an NMEA 2000® port to which certain NMEA2000® sensors can be directly connected. Power for these networked sensors is supplied directly from the radar itself. This unique feature allows for flexible installation of multiple NMEA 2000® sensors without the need to run cables all the way to the main processor unit. NMEA 2000® data is converted and distributed throughout the NavNet 3D Ethernet network.



**MAXSEA PC Software**  
Ethernet



**Autopilot NAVpilot500/511/520**  
NMEA0183

**MOB Pendant System Ready**  
Any NN3D system is compatible with every Wireless MOB Pendant System through the MOB Contact Closure Input.



The Most Amazing Chart Plotter You've Ever Seen

The NavNet 3D chart plotter is the most impressive piece of engineering that has ever set foot onto the marine electronics stage. With the incorporation of new TimeZero® technology, we have created a chart plotter with blazing speed. The most amazing part is utilization of native 3D charting architecture, showing the exact position of your craft in a wide variety of chart presentation formats. Incorporating a dedicated high-speed processor and powerful graphic engine, NavNet 3D delivers unprecedented level of performance and utility by seamlessly integrating diverse, essential navigational data.

## Mapmedia Vector and Raster Chart Library

NavNet 3D utilizes Mapmedia Vector and Raster charts, based on the official paper charts from local hydrographic offices and related organizations. Mapmedia brings an authentic vector and raster chart library for the areas you sail. Mapmedia cartography integrates a cutting edge data analytic algorithm with high resolution image processing techniques to deliver a fusion of digital navigation charts and satellite photography which provides absolute clarity and detail when displayed by NavNet 3D.



### Mapmedia Vector

Vector charts contain a huge volume of data in different layers, each of which can be selectively displayed. As you zoom into the chart, increasing levels of detail can be obtained without any sacrifice in image resolution.



Mapmedia Vector



Vector + Satellite PhotoFusion™

### Mapmedia Raster

Mapmedia raster charts are digitized official paper charts, issued by hydrographic offices. NavNet 3D brings highly reliable, professional hydrographic cartography to recreational boating.

A high-resolution scan has been applied to Mapmedia raster charts so that quality will not deteriorate even when the chart is viewed in close-up.




Mapmedia Raster



Radar-Chart overlay

### Satellite PhotoFusion™

Satellite photography is included in the Mapmedia Raster and Vector charts, and Satellite PhotoFusion™ with the charts is a feature available only with FURUNO's NavNet 3D. Land areas (zero depth) are completely opaque, so that these areas are displayed as satellite photos on the chart. As the depth increases, the satellite image is merged with the chart data to provide you, the user, with added detail on seabed areas in shallow water without losing vital chart information. In deeper water where the satellite image has no detail to offer, the chart is displayed without alteration. This ensures that navigational integrity is not only maintained but also enhanced where it is most needed in areas where grounding might be a risk.

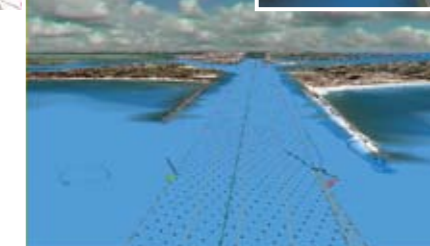


On top of the cartography, you can save the following marks and points in the NavNet 3D internal memory:

- Up to 12,000 ship's track points;
- Up to 2,000 points and
- 200 planned routes, within which up to 100 waypoints can be placed.


### Depth Shading

A depth color scale can be applied on both 2D and 3D vector and raster charts. Transparency levels can be adjusted so that the chart data is visible beneath the color shading. This unique feature allows you to view water depths at-a-glance with vibrant colors. No more searching for depth numbers, when you can simply set depths to your specified colors. Whether you want to see the depth for navigation or fishing purposes, this new feature makes it easier than ever.

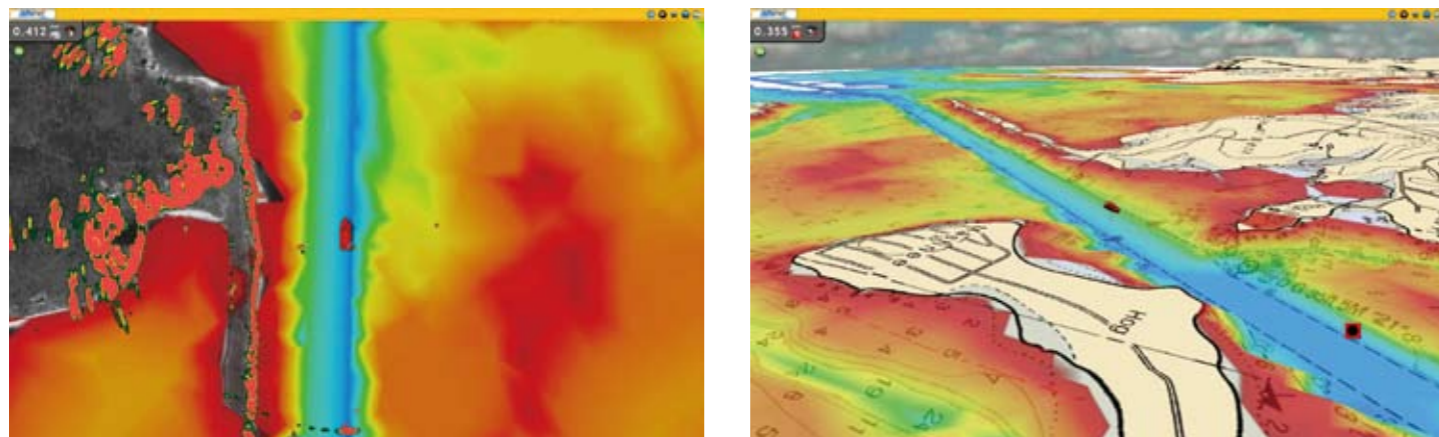

### Preloaded Tides and Currents information

NavNet 3D also comes preloaded with tides and currents information of worldwide coverage, which can be overlaid with the chart display.

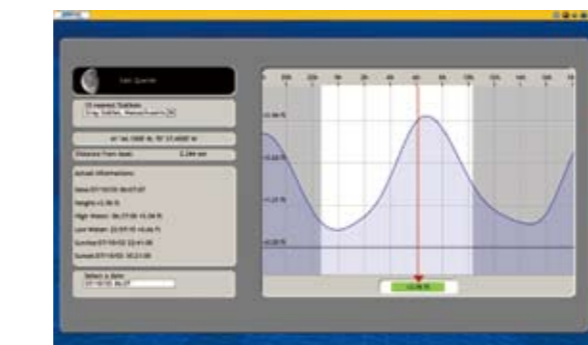

**1 Tide Symbol**  
Tide symbols are located where tide stations are. When you place the cursor over a tide symbol, the symbol is magnified. By selecting a tide symbol, you can view a graph for predictions for maximum and minimum tide heights as well as times for sunrise and sunset.



**2 Current Indicator**  
Arrow indicates current direction, and the arrow size and color indicate current speed.



### NAV Data Display and Engine Monitoring

#### NAV Data Display

Selected NAV data can be shown at the edges of the screen in nav data windows.



**1 Range Data**  
Automatically changes range scale settings between long range (mile, nautical mile or kilometer) and short range (foot, meter or yard) according to the current display range.

**2 Cursor Data**  
Shows the latitude and longitude position where the cursor is on the chart.

- Information to be displayed
- Position
  - Range
  - Bearing

**3 Ship's Data**  
These user-specified data boxes allow you to display the information you want to see. Customize the data boxes to show single or multiple pieces of information. Click on the box and it will show you the variety of data you can display. When you select multiple data, it will rotate at a specified time interval.

- Information to be displayed
- Position
  - COG
  - SOG
  - Depth
  - SST
  - STW
  - Heading
  - True Wind Speed
  - True Wind Direction
  - True Wind Angle
  - Apparent Wind Speed
  - Apparent Wind Angle
  - ROT
  - Trip Log
  - Odometer
  - Date and Time

#### On-screen Navigational Instrument

NavNet 3D delivers various on-screen navigation instrument displays.



**1 Compass Rose display**  
In the Compass Rose display, you can view the heading, bearing to the waypoint and COG information at the same time in order to see if your craft is on the right track.

**2 Engine Monitoring**  
When interfaced with an engine that outputs data in NMEA 2000 format, NavNet 3D can show an on-screen engine monitoring display. The information displayed includes: tachometer, boost pressure, engine temperature and oil pressure.

**3 Wind Speed and Direction**  
Either true or apparent wind speed and direction can be shown, when interfaced with a wind sensor.



NavNet 3D Radar  
NavNet 3D's new Ultra High Definition (UHD™) Digital Radar technology sets a new standard in marine radar. With highly advanced digital sensor and signal processing technologies, UHD™ Digital Radar greatly enhances situational awareness.



- Enhanced detection both in long and short range by Digital Radar Sensor
- Seamless zoom in/out radar range scales (MFDBB)
- Enhanced auto gain and anti-clutter controls and auto tuning
- 48 rpm antenna rotation speed for HSC and river applications
- Adaptive antenna rotation speed according to pulse length
- Spot-on radar overlay on both 2D/3D chart presentation with aid from heading sensors
- True echo trail shows an afterglow of moving radar targets
- True Color Radar shows density of targets (32 color levels for the MFD8 and MFD12, 256 color levels for the MFDBB)
- Radar Guard Zone and Watchman features alert you to potential danger
- Dual VRM (Variable Range Markers) and dual EBL (Electric Bearing Lines) give distance and bearing indications
- Off-center display allows you to focus on specific direction with a simple press of the cursor pad
- IP address is automatically assigned to deliver Plug and Play installation

## Real-time Dual Range Radar presentation thanks to dual progressive scan method

NavNet 3D simultaneous scanning technology allows dual progressive scan to display and update two radar pictures of long and short range at the same time, as opposed to alternate update of two different radar range scales in typical conventional dual range radar. Autonomous control over gain and anti-clutter can be performed on each radar display in the dual radar mode. This can be used to have one screen with the gain set to locate birds and buoys, while you use the other radar screen to navigate.

## Radar-Chart overlay

Radar image of spot-on accuracy can be overlaid with the chart information. Not only is it done with the conventional 2D chart format, but also it can now be projected onto 3D chart presentation! Radar range scales in the radar-chart overlay entirely depend on the range scales in the chart presentation, allowing you to view the radar image on the chart information in whatever magnification level you desire. (Appropriate heading sensor is required.)

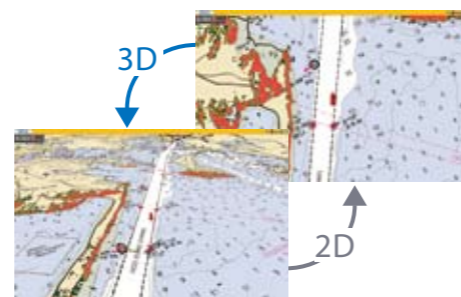
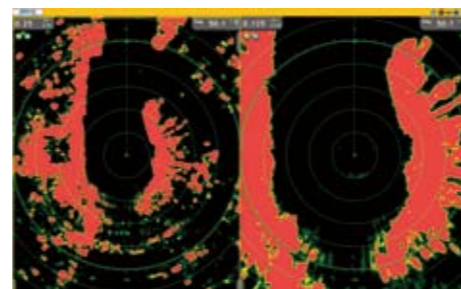


## ARPA/AIS target tracking


Automatic radar plotting utility is one of the standard features of the NavNet 3D radar. Up to 30 targets can be simultaneously acquired and tracked to show you the heading direction and speed of the targets. AIS target tracking can also be performed when the FA-30/50/150 is interfaced with NavNet 3D.

## Real-Time Digital Auto Gain/Sea Controls

NavNet 3D employs revolutionary real-time digital auto Gain/Sea controls to deliver crystal clear radar presentation. With this new technology, NavNet 3D computes and applies an adaptive omni-directional anti-clutter filter with variable intensity depending on bearing.

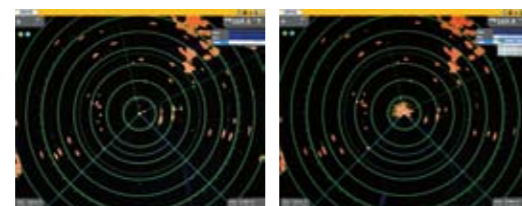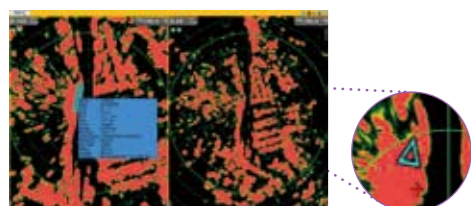

Auto Gain/Sea Controls On    Auto Gain/Sea Controls Off

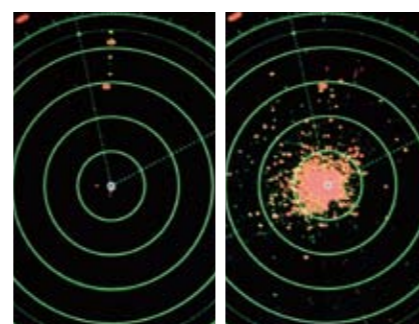

Auto Gain/Sea Controls On    Auto Gain/Sea Controls Off



## Radar Sensors


The NavNet 3D radar processor is incorporated into a Radome antenna or a gearbox for an open antenna. Simply plug in Ethernet and power cable connectors, and you will have a digital radar sensor within your NavNet 3D network. The IP address is automatically assigned to the radar sensor upon plugged into the network, facilitating real Plug and Play installation.

## NavNet 3D Radar Sensor Options

	DRS2D	DRS4D	DRS4A	DRS6A	DRS12A	DRS25A
Output Power	2.2 kW	4 kW	4 kW	6 kW	12 kW	25 kW
Size	19 inch	24 inch	3.5 ft	4 ft	4 ft/6 ft	4 ft/6 ft
Antenna Type	Radome	Radome	Open	Open	Open	Open
Beam Width	Horizontal	5.2°	4.0°	2.3°	1.9°	1.9°/1.4°
	Vertical	25°	25°	22°	22°	22°/22°
Max. Range	24 nm	36 nm	48 nm	64 nm	72 nm	96 nm
48 rpm Capability	●	●	●	●	●	●

## FURUNO NMEA 2000® base network

The NavNet 3D radar sensor incorporates an NMEA 2000® port to which FURUNO's NMEA 2000® sensors such as the WS-200 Weather Station and the SC-30 Satellite Compass can be directly connected. Power for these networked NMEA 2000® sensors is supplied from the NMEA 2000® bus. This unique feature allows for flexible installation of multiple NMEA 2000® sensors without the need to run cables all the way to the main processor unit. NMEA 2000® data can be converted and distributed throughout the NavNet 3D Ethernet network.

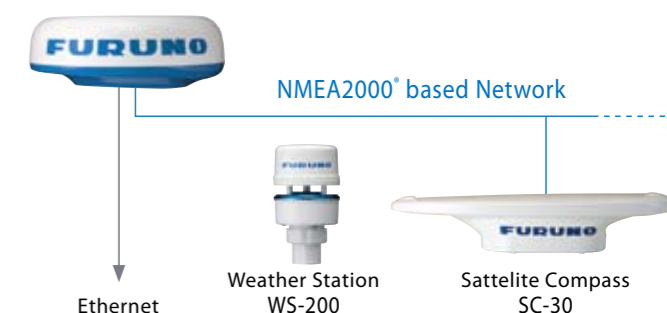

# FISH FINDER





NavNet 3D Network Fish Finder  
The FURUNO DFF1 and DFF3 can turn any NavNet 3D display into a powerful, dual frequency fish finder. They can be connected directly to a NavNet display or an Ethernet hub with a single Ethernet cable. DFF1 has 600 W or 1 kW output power, while DFF3 (available summer 2008) has 1/2/3 kW output power. Both supports a variety of transducer options.


- Enhanced detection of fish targets by FURUNO Digital Filter (FDF™) Fish Finder technology
- Selectable display modes include High or Low Frequency, Dual Frequency, Zoom, Nav Data, A-Scope, Marker Zoom, Bottom Zoom or Bottom-Lock
- Audio and visual alarms alert you whenever preset limits are met for water depth, water temperature and fish echoes
- Two selectable automatic gain control modes: Cruising and Fishing modes to match your boating purposes
- IP address is automatically assigned for Plug and Play installation

## FURUNO Free Synthesizer (FFS) transceiver on the DFF3 allows you to choose any two frequencies from 28 to 200 kHz

FURUNO free Synthesizer (FFS), a mechanism used for the professional fish finder FCV-1200L, is utilized for the DFF3 (avail. Summer 2008) transceiver. FFS allows you to operate a fish finder in any of the two operating frequencies from 28 to 200 kHz without using a matching box. This mechanism gives you the freedom to choose your operating frequencies for more productive fishing. Output power of the DFF3 can also be selected among 1, 2 and 3 kW to suit a variety of situations.

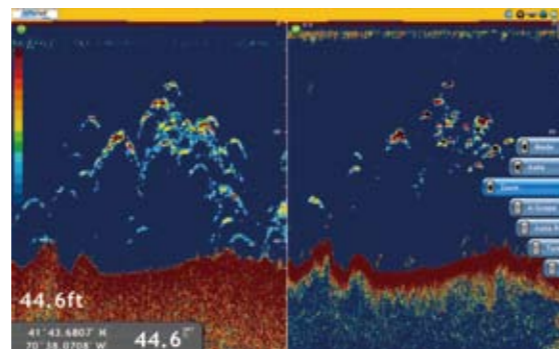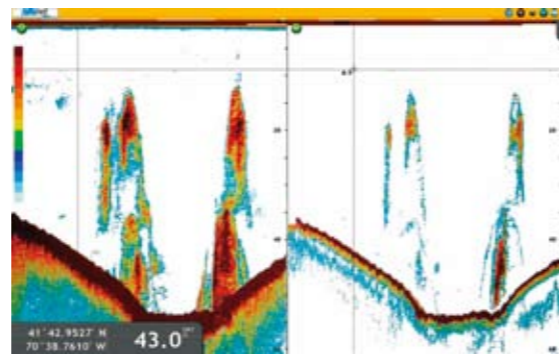

# DISPLAY

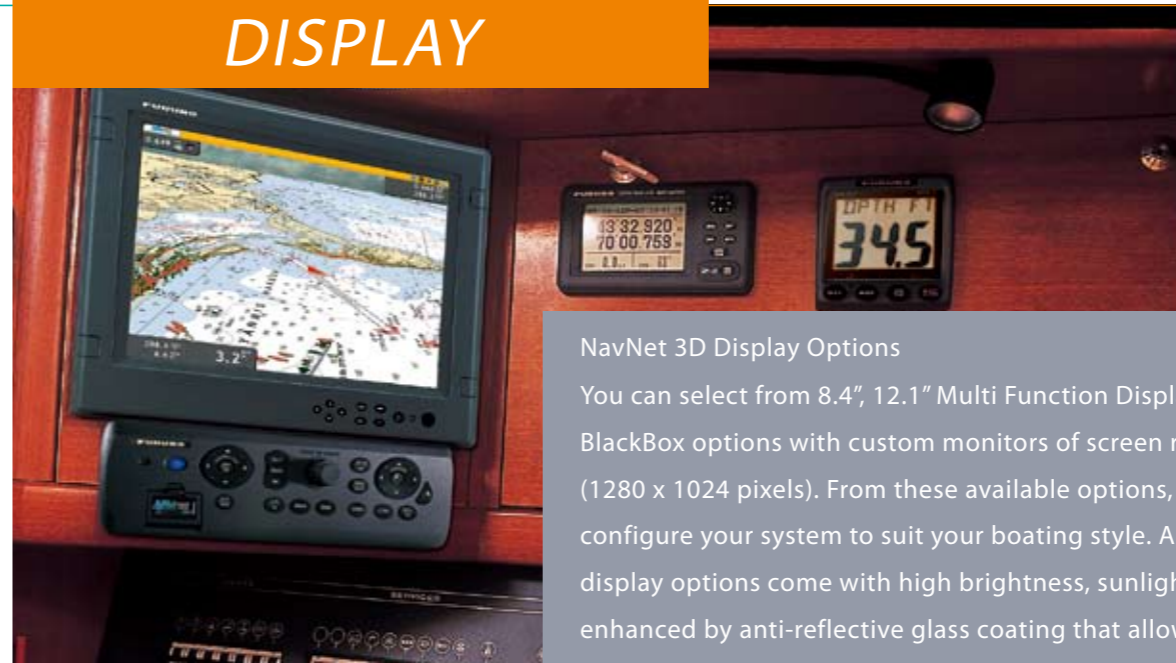

NavNet 3D Display Options  
You can select from 8.4", 12.1" Multi Function Displays (MFDs) or BlackBox options with custom monitors of screen resolution up to SXGA (1280 x 1024 pixels). From these available options, you can freely configure your system to suit your boating style. All of these NavNet 3D display options come with high brightness, sunlight viewable capability enhanced by anti-reflective glass coating that allows operation even under the direct sunlight.

## 8.4" and 12.1" MFDs

Choose from 8.4" or 12.1" NavNet 3D MFDs. Its low profile design fits beautifully right into your helm console. Fog-free structural design has been applied to both MFD8 and MFD12 so that the presentation will never be disturbed by water condensation, caused by air gap between the LCD and the front coverplate.

MFD8



MFD12



## BlackBox Configuration

The NavNet 3D BlackBox configuration is available for those who wish to make use of a display of your choice together with a powerful NavNet 3D BB processor. You can select either FURUNO's lineup of 12.1", 15", 17" Marine LCDs or other third party displays.



DCU12



MFDBB Processor

Combine 12.1" Display Control Unit (display with keyboard control unit) DCU12 together with MFDBB Processor to configure the NavNet 3D BlackBox system

N.B., NavNet 3D Processor is not included in the DCU12.



MU Series Marine LCDs



MFDBB Processor



MFDBB Keyboard

Combine FURUNO's Marine LCD MU Series with MFDBB Processor and Keyboard to configure the NavNet 3D BlackBox system

### Easy Flush Mount Installation

Flush mount installation can be done more easily than ever. All the NavNet 3D display options attach to the mounting console with bolts from the front side.




### NavNet 3D Display Options

	MFD8	MFD12	MFDBB
Screen Size and Resolution	8.4" LCD VGA (640 x 480) Video Out Resolution: VGA	12.1" LCD SVGA (800 x 600) Video Out Resolution: SVGA	12.1" SVGA (800 x 600) 15" XGA (1024 x 768) 17" SXGA (1280 x 1024)
Brightness	700 cd	1100 cd	
NMEA0183 in/out	3 x in/out ports		
NMEA2000	1 port		
Ethernet (100 BASE-TX)	1 port		4 port hub included
USB	1 x USB 1.1		2 x USB 2.0
Video IN (NTSC/PAL)	2 inputs		4 inputs
SD Card Slot	2 slots		2 slots in a control unit
Audio IN/OUT	1 output		

### Changing display arrangements is simpler than ever before!

NavNet 3D allows you to customize your display from a single screen presentation up to a four-way-split arrangement. NavNet 3D comes standard with five display hot-pages to select, with the ability to increase your options to ten hot-pages. Rearrange the display configuration to suit your style by combination of the DISP key and RotoKey™. You can freely configure the display so that you will have the information you want right where you want it!

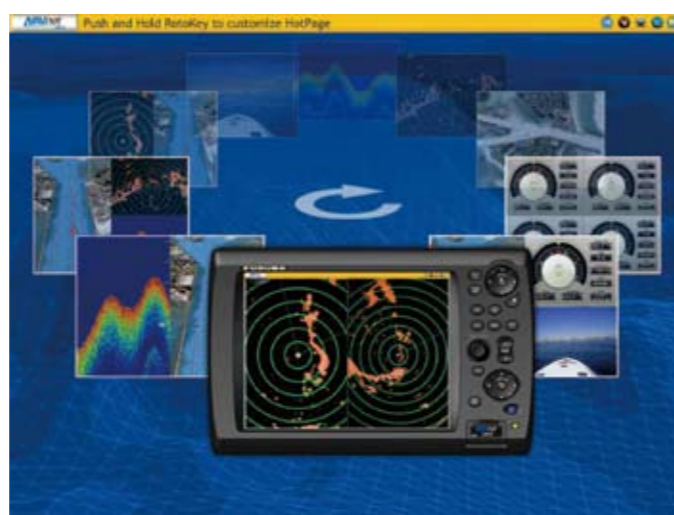

#### Single Screen Display


In this mode, you can place the presentation of chart plotter, radar, fish finder and external video camera.



#### Split-Screen Display

NavNet 3D allows you to split the screen up into four separate segments. In each segment, you can place the following information.

- 1 You can place the presentation of chart plotter, radar, fish finder and external video camera in the halfway-split screen.
- 2 In the quarter-split-screen, you can place the presentation of chart plotter, radar, fish finder, external video camera and navigation instruments.

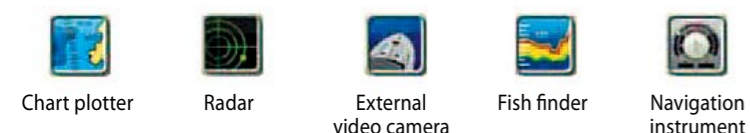

### Status Bar and Status Icons

The status bar at the top of the display provides you with operating information with text messages and sensor status icons.

#### Default



Bar color turn to red



#### Emergency



#### Sensor Status Icons

The sensor status icons show whether the sensors are active or inactive. The sensor icons are animated when active, and a red "X" is placed over the icons when inactive.



	Sensor working in order	Sensor inactive
Multimedia		
Weather		
Compass		
GPS		
Fish Finder		
Radar		


#### Text Message

The text messages include operational guide and alarm messages. When set alarm criteria are met or violated, the status bar turns red and the warning status message is shown in the status bar.



### IP Camera & External Video Camera Displays

NavNet 3D displays video input from onboard IP cameras and analog video cameras, allowing you to monitor the engine room and surroundings while navigating from the helm or keeping an eye on blind spots while docking. The MFD8 and MFD12 incorporates two video input ports, while the MFDBB has four video input ports, supporting multiple video sources to be displayed at the same time for enhanced navigation monitoring. Up to four IP cameras can be connected to the network. Pan, tilt and zoom features can be controlled from the NavNet 3D scrolling pad when utilizing Axis IP cameras with these capabilities.

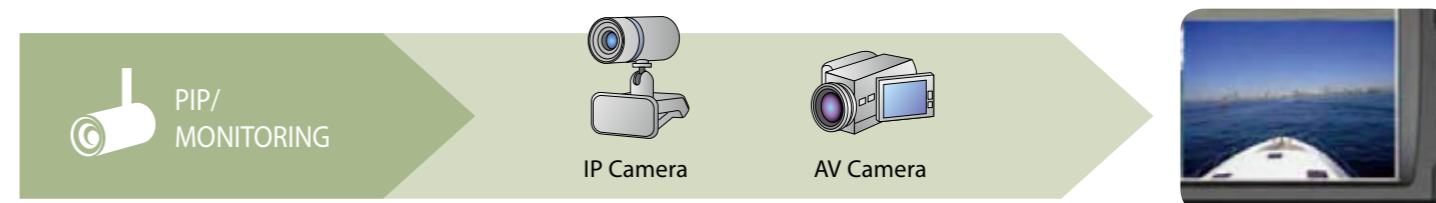

#### Onboard Monitoring



#### Engine Room Monitoring





Enhanced Monitoring of Surrounding Areas  
Once interfaced with the Satellite Compass, AIS receiver/transponder and other interface options, NavNet 3D enables enhanced monitoring of vessel traffic around your craft. This would boost your situational awareness, which ultimately leads to safer boating.


## Enhanced Radar-Chart Overlay, ARPA Target Tracking and Echo Trail

When interfaced with the highly accurate heading data from the SC-30/50/110 Satellite Compass, NavNet 3D radar-chart overlay, ARPA target tracking and echo trail functions can be greatly enhanced.

Even when your craft turns around quickly or run into rough sea conditions, NavNet 3D with the SC-30/50/110 presents clear and stable radar echo trails, constant ARPA target tracking and spot-on radar-chart overlay.



Radar-Chart overlay

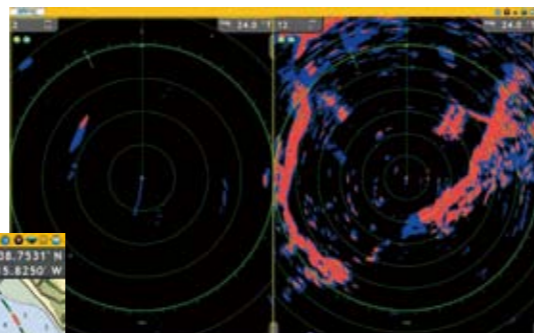

Radar echo trail

## AIS Target Tracking


When FURUNO AIS FA-30/50/150 is interfaced with NavNet 3D, the AIS information is integrated into the NavNet 3D network to facilitate enhanced monitoring of the surrounding area from any station. Up to 100 AIS targets can be tracked and displayed with five different symbols to indicate their status. Detailed information about a specific target can be viewed in a pop-up AIS data window when you select the target with the cursor.



### What is AIS?

The Automatic Identification System (AIS) improves the safety level of boating by exchanging information about the status of your ship with other AIS-equipped craft nearby. The system utilizes VHF broadcasts to handle information about the surrounding area, such as other craft and buoys and other aids-to-navigation.

The AIS data includes target position, course and speed over ground, allowing you to foresee the course changes of particular targets. AIS targets are constantly visible even when they are shrouded in fog or darkness, or hidden behind headlands, river bends or other obstructions.

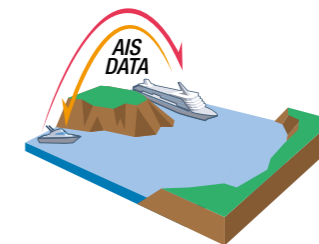


### Information to be Exchanged

- |  |  |
|--|--|
| <b>Dynamic Data</b> <ul style="list-style-type: none"> <li>Ship's Position</li> <li>Coordinated Universal Time (UTC)</li> <li>Course over Ground (COG)</li> <li>Speed over Ground (SOG)</li> <li>Rate of Turn (ROT)</li> <li>Heading</li> <li>Navigation Status</li> </ul> | <ul style="list-style-type: none"> <li>Ship's Name</li> <li>Type of Ship</li> <li>Call Sign</li> <li>Length and Beam</li> <li>Location of Position-Fixing Antenna on the Ship</li> </ul> |
| <b>Static Data</b> <ul style="list-style-type: none"> <li>MMSI (Maritime Mobile Service Identity)</li> <li>IMO Number</li> </ul>   | <b>Voyage-Related Data</b> <ul style="list-style-type: none"> <li>Ship's Draft</li> <li>Hazardous Cargo</li> <li>Destination and Estimated Time of Arrival (ETA)</li> </ul>              |
| <b>Safety-Related Messages</b>   |  |



### Heaving Compensation with Satellite Compass SC-30/50/110

Unstable fish finder presentation caused by craft's heaving motion will no longer be an issue. FURUNO's Satellite Compass SC-30/50/110 detects your craft's heaving motion and transfers the data to the networked fish finder. The network fish finder, in its turn, will correct the echo distortion to deliver a stable underwater presentation to your network.

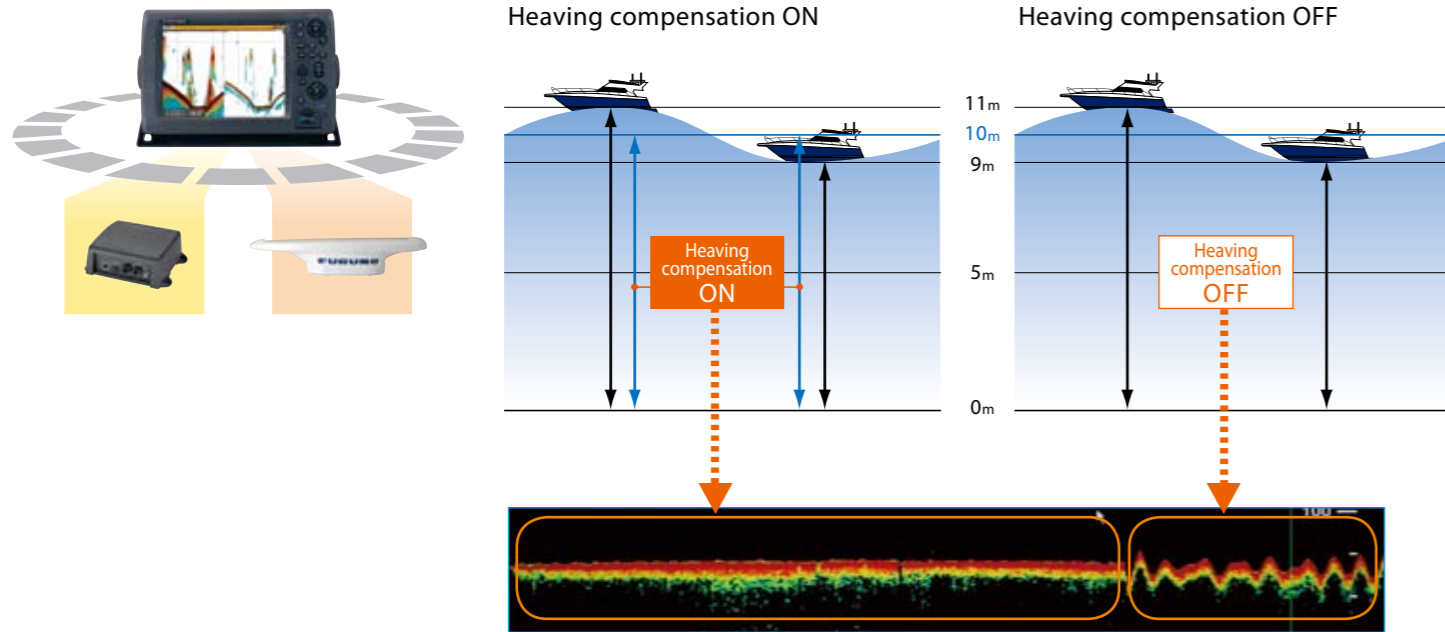

### FAX-30


Turn your NavNet 3D display into Weather fax and NAVTEX receiver by connecting the FAX-30 into the NavNet 3D network.

- ✓ Up to 12 satellite photos can be stored in memory
- ✓ Programmed with all currently available facsimile stations: up to 320 channels storable
- ✓ Presentation in monotone, 16-gradation gray scale or color (three patterns of color presentation are available)
- ✓ Built-in NAVTEX receiver (490 kHz and 518 kHz) can store up to 130 messages



WWW.NAVNET.COM

Whenever you require any information about NavNet 3D, just visit our web site, solely dedicated to the current and would-be users of NavNet 3D, [www.NavNet.com](http://www.NavNet.com). At NavNet.com, you can access the contents with in-depth product information from various angles, including a NavNet 3D demonstration film, introduction to the product, product specifications, online tutorial, system suggestions and online system builder and much more! Also, you can find answers to questions you may have in our solution database (FAQs) on the web site.

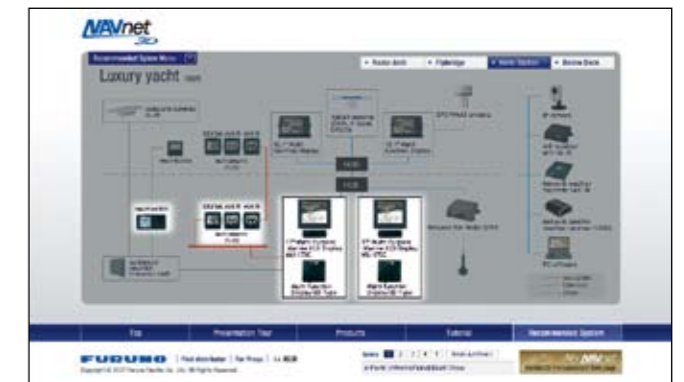

### Your benefits from "My NavNet" through NavNet 3D online user-registration

For your convenience, you can register your NavNet 3D products online at NavNet.com. When you register online, you will automatically gain access to your "My NavNet" page where you will gain access to various premium benefits, including: online software updates, online chart update and personalized news services. The site is updated constantly to deliver the most up-to-date information about the product.








Multi Function Display DISPLAY UNIT	MFD8	MFD12
Type	8.4" Color TFT LCD	12.1" Color TFT LCD
Screen Size	8.4", 170.4 x 127.8 mm	12.1", 246.0 x 184.5 mm
Screen Resolution	VGA 640 x 480 pixels	SVGA 800 x 600 pixels
Screen Brightness	700 cd (typical)	1100 cd (typical)
Display Colors	Chart Plotter/Menu: 65,536 colors Fish Finder: 64 colors Radar: 32 Colors	
Language	English (US & UK), French, Spanish, German, Italian, Portuguese, Swedish, Danish, Norwegian, Finnish, Dutch, Japanese	
<b>PLOTTER CHARACTERISTICS</b>		
Memory Capacity	Up to 12,000 points for ship's tracks, 2000 user points, 200 planned routes (100 points per route)	
Display Modes	Course plot, NAV data, Navigational instrument display, Engine monitoring display	
Latitude Limit	Between 85°N and 85°S	
<b>RADAR CHARACTERISTICS</b>		
Alarms	Anchor Watch, XTE, Proximity, Depth, Temperature, Speed, Trip Log, Countdown, Timer, Alarm Clock	
<b>DISPLAY CHARACTERISTICS</b>		
Display Modes	Head-up, Course-up*, North-up*, Relative Motion, True Motion** (**Heading input required **Heading and speed inputs required)	
Echo Trail	Interval: 15 s, 30 s, 1 min, 3 mins, 6 mins, 15 mins, 30 mins and continuous	
<b>INTERFACE</b>		
LAN	1 Port, 100 BASE-TX	
NMEA0183	3 Ports for Input/Output	
Interface (NMEA0183)	Input:	DBK, DBS, DBT, DPT, DTM, GGA, GLL, GNS, HDG, HDM, HDT, MDA, MTW, MWV, RMA, RMC, ROT, VDM, VHW, VTG, VWR, VWT, ZDA, FURUNO Proprietary Sentences are used for pitch, roll and heave data input from FURUNO Satellite Compass SC series.
	Output:	AAM, APB, BOD, BWC, BWR, DBT, DPT, DTM, GGA, GLL, GNS, GTD, HDG, HDT, MTW, MWV, RMA, RMB, RMC, ROT, VHW, VTG, WPL, XTE, ZDA, ZTG, FURUNO Proprietary Sentence is used for true heading, pitch and roll data output.
NMEA2000*	1 Port	
Interface (NMEA2000*)	Input:	059392, 059904, 060928, 126208, 126992, 126996, 127245, 127250, 127251, 127257, 127258, 127488, 127489, 128259, 128267, 129025, 129026, 129029, 129033, 129044, 129538, 129540, 129808, 130306, 130310, 130311, 130577
	Output:	059392, 059904, 060928, 126208, 126464, 126992, 126996, 127245, 127250, 127251, 127257, 127258, 128275, 128259, 128267, 129025, 129026, 129029, 129033, 129283, 129284, 130306, 130310, 130311
USB Port	1 Port (USB 1.1)	
Video Output	1 Port (DVI-D VGA)	1 Port (DVI-D SVGA)
Video Input	2 Ports (NTSC/PAL)	
Line Out	1 Port	
SD Card Slot	2 Slots	
Variable Line Level Stereo Output	N/A	
<b>ENVIRONMENT</b>		
Temperature (IEC60945)	Display Unit	-15°C to +55°C
	Processor Unit	
	Control Unit	N/A
Waterproofing	Display Unit	IP56 (IEC60529)
	Processor Unit	N/A
	Control Unit	N/A
<b>POWER SUPPLY</b>		
	12-24 VDC	
	29 W/73 W (with DRS2D)/77 W (DRS4D)/104 W (with DRS4A)/131 W (with DRS6A)/143 W (with DRS12A)/174 W (with DRS25A)	41 W/86 W (with DRS2D)/91 W (DRS4D)/132 W (with DRS4A)/144 W (with DRS6A)/159 W (with DRS12A)/186 W (with DRS25A)
	100/110/220/230 VAC with optional rectifier RU-1746B-2/PR-62/RU-3423	


\* With regard to the NMEA 2000 PGN specifications, please refer to P.37.

Multi Function Display	MFD8
	MFD12
	MFD8B
Network Fish Finder	DFF1
	DFF3
GPS/WAAS Receiver Antenna	GP-320B
	GP-330B
Network Weather Facsimile Receiver	FAX-30
LCD Display	MU-120C
	MU-155C
	MU-170C
Display Control Unit	DCU12
NavNet 3D Radar Sensor	DRS2D
	DRS4D
	DRS4A
	DRS6A
	DRS12A
	DRS25A


Multi Function Display (Table-top Mount) MFD8  
4.7 kg 10.4 lb

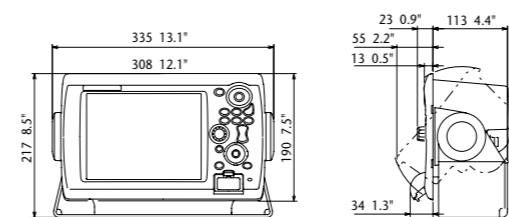


Multi Function Display (Flush Mount) MFD8  
3.9 kg 8.6 lb

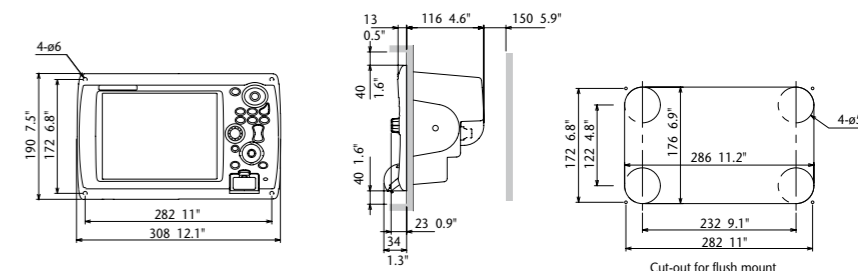

Multi Function Display (Table-top Mount) MFD12  
6.8 kg 15.0 lb

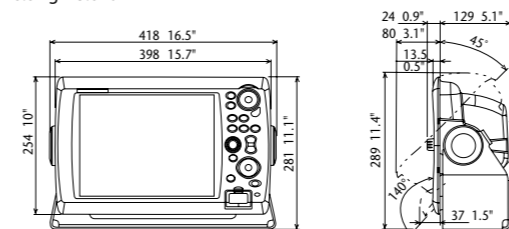

Multi Function Display (Flush Mount) MFD12  
5.4 kg 11.9 lb

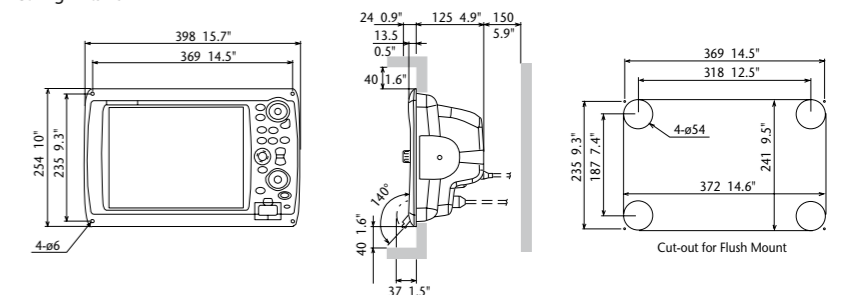

# SPECIFICATIONS





Multi Function Display		MFDBB	
DISPLAY UNIT			
Type	Custom monitor of your choice		
Screen Size	Please refer to the specifications of DCU12, MU-120C/155C/170C		
Screen Resolution	SVGA 800 x 600 pixels, XGA 1024 x 768 pixels or SXGA 1280 x 1024 pixels		
Screen Brightness	Please refer to the specifications of DCU12, MU-120C/155C/170C		
Display Colors	Chart Plotter/Menu: 262,144 colors Fish Finder: 64 colors Radar: 256 colors		
Language	English (US & UK), French, Spanish, German, Italian, Portuguese, Swedish, Danish, Norwegian, Finnish, Dutch, Japanese		
PLOTTER CHARACTERISTICS			
Memory Capacity	Up to 12,000 points for ship's tracks, 2000 user points, 200 planned routes (100 points per route)		
Display Modes	Course plot, NAV data, Navigational instrument display, Engine monitoring display		
Latitude Limit	Between 85°N and 85°S		
Alarms	Anchor Watch, XTE, Proximity, Depth, Temperature, Speed, Trip Log, Countdown, Timer, Alarm Clock		
RADAR CHARACTERISTICS			
Display Modes	Head-up, Course-up*, North-up*, Relative Motion, True Motion** (*Heading input required **Heading and speed inputs required)		
Echo Trail	Interval: 15 s, 30 s, 1 min, 3 mins, 6 mins, 15 mins, 30 mins and continuous		
INTERFACE			
LAN	4-Port Hub is included, 100 BASE-TX		
NMEA0183	3 Ports for Input/Output		
Interface (NMEA0183)	Input:	DBK, DBS, DBT, DPT, DTM, GGA, GLL, GNS, HDG, HDM, HDT, MDA, MTW, MWV, RMA, RMC, ROT, VDM, VHW, VTG, VWR, VWT, ZDA, FURUNO Proprietary Sentences are used for pitch, roll and heave data input from FURUNO Satellite Compass SC series.	
	Output:	AAM, APB, BOD, BWC, BWR, DBT, DPT, DTM, GGA, GLL, GNS, GTD, HDG, HDT, MTW, MWV, RMA, RMB, RMC, ROT, VHW, VTG, WPL, XTE, ZDA, ZTG, FURUNO Proprietary Sentence is used for true heading, pitch and roll data output.	
NMEA2000*	1 Port		
Interface (NMEA2000*)	Input:	059392, 059904, 060928, 126208, 126992, 126996, 127245, 127250, 127251, 127257, 127258, 127488, 127489, 128259, 128267, 129025, 129026, 129029, 129033, 129044, 129538, 129540, 129808, 130306, 130310, 130311, 130577	
	Output:	059392, 059904, 060928, 126208, 126464, 126992, 126996, 127245, 127250, 127251, 127257, 127258, 128275, 128259, 128267, 129025, 129026, 129029, 129033, 129283, 129284, 130306, 130310, 130311	
USB Port	2 Ports (USB 2.0)		
Video Output	2 Ports (DVI-D)		
Video Input	4 Ports (NTSC/PAL)		
Line Out	1 Port		
SD Card Slot	2 Slots		
Variable Line Level Stereo Output	1 Port		
ENVIRONMENT			
Temperature (IEC60945)	Display Unit	-15°C to +55°C (DCU12)	
	Processor Unit	0°C to +45°C	
	Control Unit	-15°C to +55°C	
Waterproofing	Display Unit	IP56 (DCU12 when flush mounted) IEC60529	
	Processor Unit	IP20	
	Control Unit	IP56 (MCU-001 when flush mounted) IEC60529	
POWER SUPPLY			
		12-24 VDC	
		104 W/149 W (with DRS2D)/154 W (DRS4D)/195 W (with DRS4A)/207 W (with DRS6A)/222 W (with DRS12A)/249 W (with DRS25A)	
		100/110/220/230 VAC with optional rectifier RU-1746B-2	

\* With regard to the NMEA 2000 PGN specifications, please refer to P.37.

Multi Function Display MFDBB  
BlackBox Processor Unit MPU-001  
15.0 kg 33.1 lb

BlackBox  
Control Unit MCU-001  
1.0 kg 2.2 lb

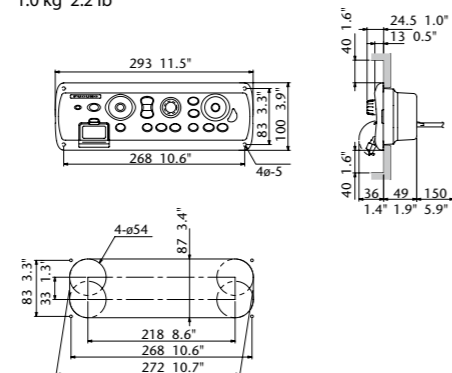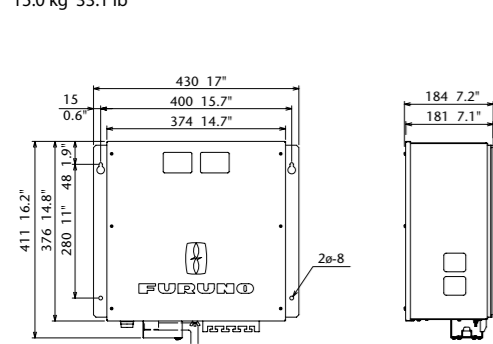


Network Fish Finder	DFF1		DFF3	
TRANSCIVER & DISPLAY				
Display Modes	Single (50 or 200 kHz), Dual (50 and 200 kHz), Bottom-lock, Bottom-Zoom, Bottom Discrimination, Marker Zoom, A-Scope		Single (High or Low frequency), Dual (Both High and Low frequencies), Bottom-lock, Bottom-Zoom, Bottom Discrimination, Marker Zoom, A-Scope	
Frequency	Dual frequency 50 kHz and 200 kHz		The synthesized transducer works with dual frequencies between 28 and 200 kHz	
Output Power	600 W/1 kW		1, 2 or 3 kW	
Range Scale	Any range customized between 2 and 1,200 m			
Range Phasing	Up to 2,400 m (8,000 ft, 1,300 fa)		Up to 2,400 m (8,000 ft, 1,300 fa)	
ENVIRONMENT				
Temperature	-15°C to +55°C			
Water Proofing	IEC 60529 IP20			
POWER SUPPLY				
		12 W		30 W
TRANSDUCERS (Specify when ordering)				
600 W 50/200 kHz: 520-5PSD (Plastic, thru-hull), 520-5MSD (Bronze, thru-hull), 520-5PWD (Plastic, transom), 525ST-MSD (Bronze, thru-hull with speed/temp sensor), 525ST-PWD (Plastic, transom, with speed/temp sensor) 1kW (Optional Matching box, MB-1100 may be required) 50 kHz: 50B-6, 50B-6B, 50B-9B 200 kHz: 200B-5S, 50/200 kHz: 50/200-1T, 50/200-12M		28 kHz 38 kHz 50 kHz  68 kHz 82 kHz 88 kHz 107 kHz 150 kHz 200 kHz 50/200 kHz	28F-8, 28F-18, 28BL-6HR, 28F-24H, 28BL-12HR 38BL-9HR, 38BL-15HR 50B-6/6B, 50B-9B, 50B-12, 50BL-12HR, 50F-24H, 50BL-24HR 68F-8H, 68F-30H 82B-35R 88B-8, 88B-10, 88F-126H 100B-10R 150B-12H 200B-5S, 200B-8/8B, 200B-12H 50/200-1ST, 50/200-1T, 50/200-12M	




GPS/WAAS Receiver Antenna		
		GP-320B
RECEIVER CHARACTERISTICS		
Receiver Type	Twelve discrete channels, C/A code, all-in-view, WAAS	
Receiving Frequency	L1 (1575.42 MHz)	
Time to First Fix	12 s (warm start)	90 s (cold start)
Tracking Velocity	999 kt	
Geodetic Systems	WGS-84, NAD-27 and others	
Accuracy	10 m (GPS) 3 m (WAAS)	
ENVIRONMENT (IEC 60945 test method)		
Temperature	-25°C to +70°C	-25°C to +55°C
Waterproofing	IEC 60529 IPX6	IEC 60529 IP56
POWER SUPPLY		
		12-24 VDC
		1.3 W

Network Weather Facsimile Receiver	
FAX-30	
TRANSCIVER CHARACTERISTICS	
Frequency Range	80 kHz to 160 kHz, 2 MHz to 25 MHz, 490 kHz, 518 kHz (NAVTEX)
Class of Emmission	F3C, J3C, F1B (NAVTEX)
Receiving System	Double superheterodyne
Storage	Fax: 12 pictures NAVTEX: 130 messages
ENVIRONMENT (IEC 60945 test method)	
Temperature	-15°C to +55°C
Waterproofing	IEC 60529 IPX2
POWER SUPPLY	
12-24 VDC	
12 W	


Network Fish Finder DFF1  
1.3 kg 2.9 lb

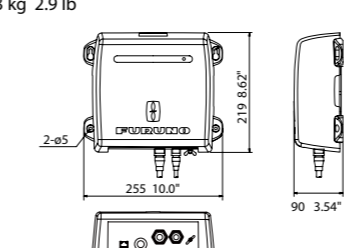


Network Fish Finder DFF3  
3.8 kg 8.4 lb

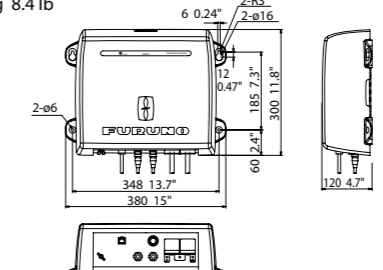



GPS/WAAS Receiver Antenna GP-320B  
0.8 kg 1.8 lb  
10 m cable attached



GPS/WAAS Receiver Antenna GP-330B  
Weight: TBD

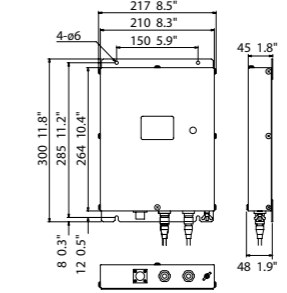

Network Weather Facsimile Receiver FAX-30  
2.0 kg 4.4 lb

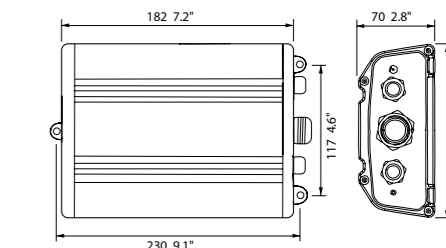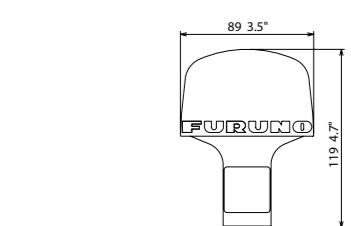





Display Control Unit		DCU12
<b>DISPLAY UNIT</b>		
Screen Size	12.1 inches, 246.0 x 184.5 mm	
Resolution	SVGA 800 x 600 pixels	
Contrast Ratio	600: 1	
Viewing Angle	Vertical	+45 to -55°
	Horizontal	left 70° to right 70°
Brightness	1100 cd	
<b>INTERFACE</b>		
DVI input	1 port, DVI-D	
Composite (RCA) input	NA	
<b>ENVIRONMENT (IEC 60945 test method)</b>		
Temperature	-15°C to +55°C	
Waterproofing	IP56 (when flush-mounted)	
<b>POWER SUPPLY</b>		
	12-24 VDC	

N.B. DCU12 is a display option for MFDBB.

Display Control Unit (Table-top Mount) DCU12  
5.7 kg 12.6 lb

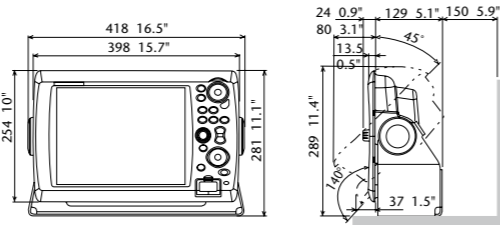


Display Control Unit (Flush Mount) DCU12  
5.4 kg 11.9 lb

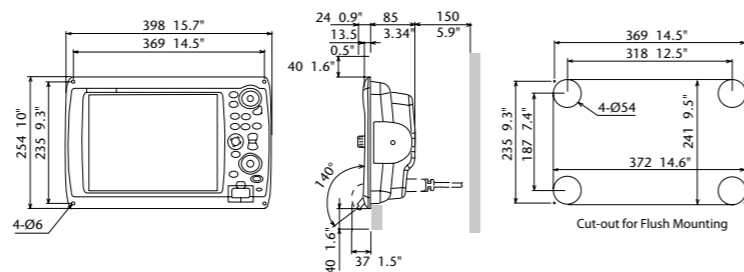


LCD Display	MU-120C	MU-155C	MU-170C
<b>DISPLAY UNIT</b>			
Screen Size	12.1 inches, 246.0 x 184.5 mm	15 inches, 304.1 x 228.1 mm	17 inches, 338.0 x 270.0 mm
Resolution	SVGA 800 x 600 pixels	XGA 1024 x 768 pixels	SXGA 1280 x 1024 pixels
Contrast Ratio	300: 1	400: 1	500: 1
Viewing Angle	Vertical	+60 to -50°	+85 to -85°
	Horizontal	left 70° to right 70°	left 85° to right 85°
Brightness	1000 cd		
<b>INTERFACE</b>			
DVI input	1 port, DVI-D		
Composite (RCA) input	3 ports, RCA		
<b>ENVIRONMENT (IEC 60945 test method)</b>			
Temperature	-15°C to +55°C		
Waterproofing	IPX5 (when flush-mounted)	IP56 (when flush-mounted)	
<b>POWER SUPPLY</b>			
	12-24 VDC		


MU-120C  
6.5 kg 14.3 lb

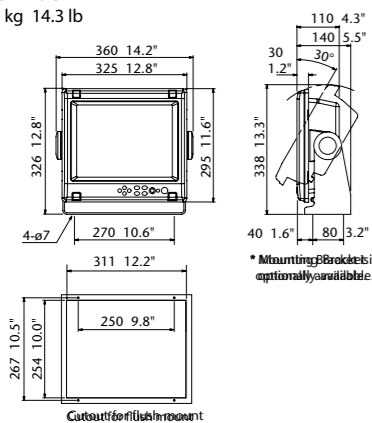

MU-155C  
9.1 kg 20.1 lb

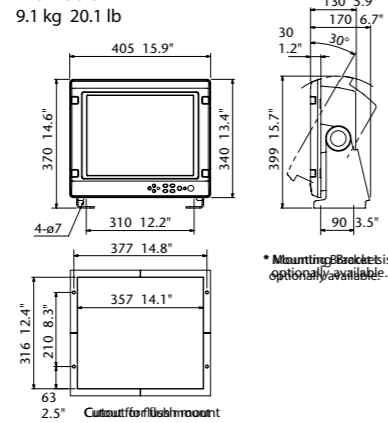


MU-170C  
12.9 kg 28.4 lb

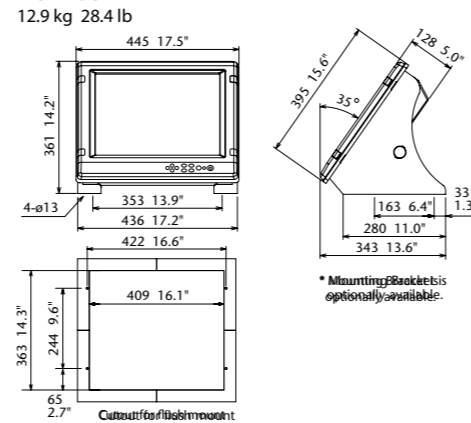


NavNet 3D Radar Sensor	DRS2D	DRS4D	DRS4A
<b>ANTENNA</b>			
Peak Output Power	2.2 kW	4 kW	4 kW
Type	19" Radome	24" Radome	3.5' Open
<b>RF TRANSCEIVER</b>			
Frequency	9410 ± 30 MHz		
Pulselength & PRR	0.08 μs/3000 Hz (0.0625 to 0.75 nm) 0.15 μs/3000 Hz (1 to 1.5 nm) 0.3 μs/1500 Hz (2 nm) 0.5 μs/1000 Hz (3 to 4 nm) 0.7 μs/600 Hz (6 to 8 nm) 0.8 μs/600 Hz (12 to 24 nm)	0.08 μs/3000 Hz (0.0625 to 0.75 nm) 0.15 μs/3000 Hz (1 to 1.5 nm) 0.3 μs/1500 Hz (2 nm) 0.5 μs/1000 Hz (3 to 4 nm) 0.7 μs/600 Hz (6 to 8 nm) 0.8 μs/600 Hz (12 to 36 nm)	0.08 μs/3000 Hz (0.0625 to 0.75 nm) 0.15 μs/3000 Hz (1 to 1.5 nm) 0.3 μs/1500 Hz (2 nm) 0.5 μs/1000 Hz (3 to 4 nm) 0.7 μs/600 Hz (6 to 8 nm) 0.8 μs/600 Hz (12 to 48 nm)
Beam Width	Horizontal	5.2°	4.0°
	Vertical	25°	25°
Range Scales	0.0625 to 24 nm	0.0625 to 36 nm	0.0625 to 48 nm
Antenna Rotation Speed	24/36/48 rpm		
Wind Load	Relative Wind 70 kt		
<b>ENVIRONMENT</b>			
Temperature	-30°C to + 55°C		
Waterproofing	IP26		
Power Amp Unit	MFDB	Not required (Power Provided by the Display Unit)	
	MFDB12	Not required (Power Provided by the Display Unit)	
	MFDBB	Not Required (Power Provided by the BB Processor)	
		PSU-012 (75 W)	


19" Radome Radar Sensor DRS2D  
6.5 kg 14.3 lb

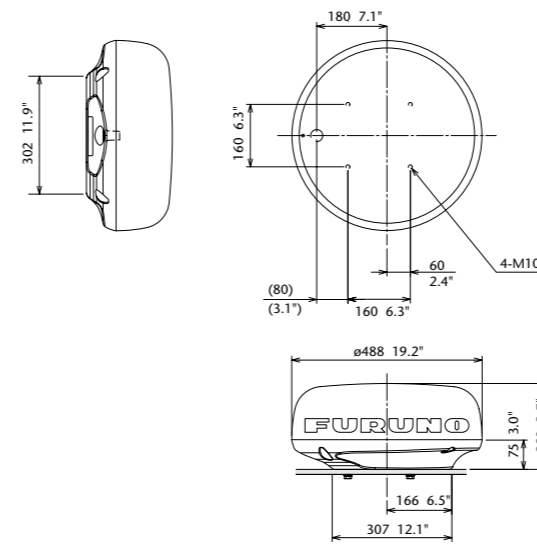

3.5' Open Radar Sensor DRS4A  
25 kg 55.1 lb

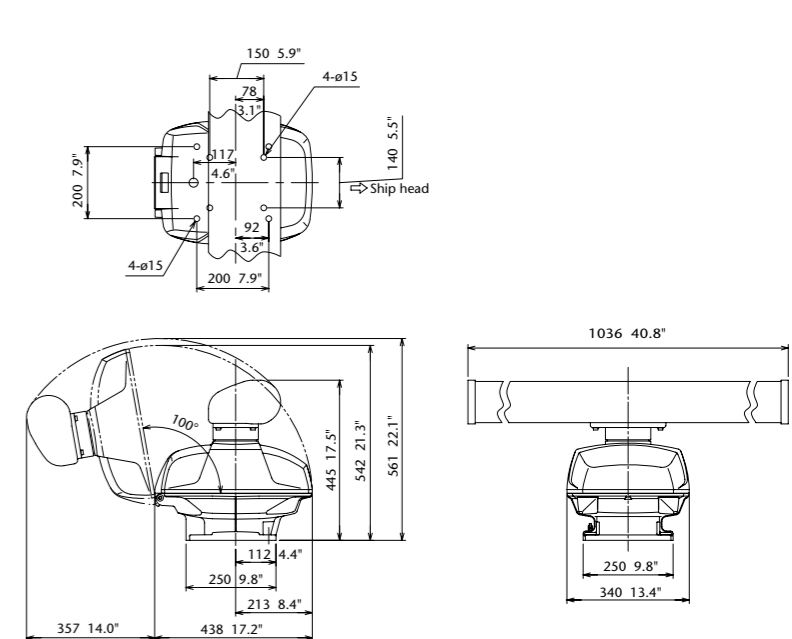

24" Radome Radar Sensor DRS4D  
7.5 kg 16.5 lb

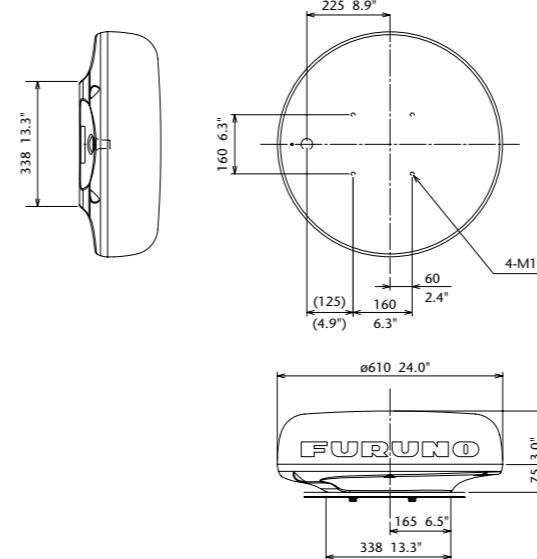






NavNet 3D Radar Sensor	DRS6A	DRS12A	DRS25A
<b>ANTENNA</b>			
Peak Output Power	6 kW	12 kW	25 kW
Type	4' Open	4'/6' Open	4'/6' Open
<b>RF TRANSCEIVER</b>			
Frequency	9410 ± 30 MHz		
Pulselength & PRR	0.08 μs/3000 Hz (0.0625 to 0.75 nm) 0.15 μs/3000 Hz (1 to 1.5 nm) 0.3 μs/1500 Hz (2 nm) 0.5 μs/1000 Hz (3 to 4 nm) 0.7 μs/600 Hz (6 to 8 nm) 0.8 μs/600 Hz (12 to 64 nm)	0.08 μs/3000 Hz (0.0625 to 0.75 nm) 0.15 μs/3000 Hz (1 to 1.5 nm) 0.3 μs/1500 Hz (2 nm) 0.5 μs/1000 Hz (3 to 4 nm) 0.7 μs/600 Hz (6 to 8 nm) 0.8 μs/600 Hz (12 to 64 nm) 0.8 μs/550 Hz (72 nm)	0.08 μs/3000 Hz (0.0625 to 0.75 nm) 0.15 μs/3000 Hz (1 to 1.5 nm) 0.3 μs/1500 Hz (2 nm) 0.5 μs/1000 Hz (3 to 4 nm) 0.7 μs/600 Hz (6 to 8 nm) 0.8 μs/600 Hz (12 to 64 nm) 0.8 μs/550 Hz (72 to 96 nm)
Beam Width	Horizontal	1.9°	1.9°/1.4°
	Vertical	22°	22°/22°
Range Scales	0.0625 to 64 nm	0.0625 to 72 nm	0.0625 to 96 nm
Antenna Rotation Speed	24/36/48 rpm		
Wind Load	Relative Wind 70 kt		
<b>ENVIRONMENT</b>			
Temperature	-30°C to + 55°C		
Waterproofing	IP26		
Power Amp Unit	MFD8	PSU-012 (102 W)	PSU-012 (118 W)
	MFD12	Not required (Power Provided by the Display Unit)	
	MFD12	PSU-012 (118 W)	PSU-012 (118 W)
	MFD8	Not Required (Power Provided by the BB Processor)	
	MFD12	PSU-013 (145 W)	
	MFD12	PSU-013 (145 W)	
	MFD12	PSU-013 (145 W)	

4' Open Radar Sensor DRS6A/12A/25A  
25 kg 55.1 lb

6' Open Radar Sensor DRS12A  
26 kg 57.3 lb

6' Open Radar Sensor DRS25A  
28 kg 61.7 lb

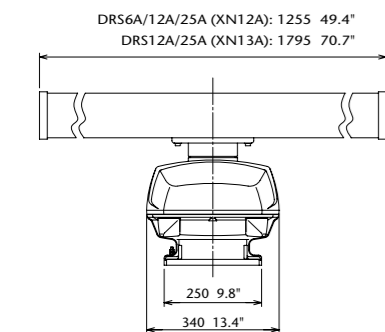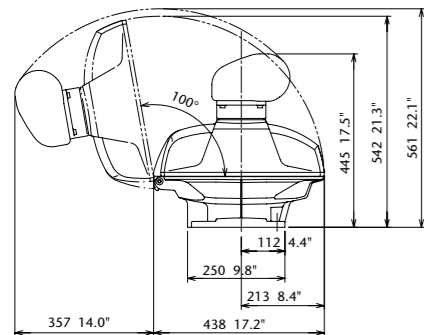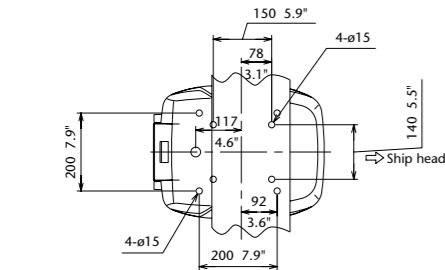

**NMEA 2000 Input**

PGN	Details
059392	ISO Acknowledgement
059904	ISO Request
060928	ISO Address Claim
	NMEA - Request group function
126208	NMEA - Command group function
	NMEA - Acknowledge group function
126992	System Time
126996	Product Information
127245	Rudder
127250	Vessel Heading
127251	Rate of Turn
127257	Attitude
127258	Magnetic Variation
127488	Engine parameters, Rapid Update
127489	Engine Parameters, Dynamic
128259	Speed
128267	Water Depth
129025	Position, Rapid Update
129026	COG & SOG, Rapid Update
129029	GNSS Position Data
129033	Time & Date
129044	Datum
129538	GNSS Control Status
129540	GNSS Satellites in View
129808	DSC Call Information
130306	Wind Data
130310	Environmental Parameters
130311	Environmental Parameters
130577	Direction Data

**Output**

PGN	Details
059392	ISO Acknowledgement
059904	ISO Request
060928	ISO Address Claim
	NMEA - Request group function
126208	NMEA - Command group function
	NMEA - Acknowledge group function
126464	PGN List
126992	System Time
126996	Product Information
127245	Rudder
127250	Vessel Heading
127251	Rate of Turn
127257	Attitude
127258	Magnetic Variation
128275	Distance Log
128259	Speed
128267	Water Depth
129025	Position, Rapid Update
129026	COG & SOG, Rapid Update
129029	GNSS Position Data
129033	Time & Date
129283	Cross Track Error
129284	Navigation Data
130306	Wind Data
130310	Environmental Parameters
130311	Environmental Parameters

NOTE